




		XXS/47	XS/49	S/52	M/54	L/56	XL/58	XXL/61
A	HEAD TUBE ANGLE	70.5 °	71.0 °	72.0 °	72.5 °	73.0 °	73.3 °	73.3 °
B	HEAD TUBE LENGTH	103.0 MM	108.0 MM	121.0 MM	141.0 MM	161.0 MM	181.0 MM	199.0 MM
C	TOP TUBE HORIZONTAL	520.0 MM	530.0 MM	540.0 MM	550.0 MM	565.0 MM	580.0 MM	600.0 MM
D	STANDOVER HEIGHT	746.4 MM	759.6 MM	779.4 MM	801.0 MM	820.0 MM	838.0 MM	853.3 MM
E	BB OFFSET	-70.0 MM	-70.0 MM	-70.0 MM	-70.0 MM	-70.0 MM	-70.0 MM	-70.0 MM
F	BB HEIGHT	274.5 MM	274.5 MM	274.5 MM	274.5 MM	274.5 MM	274.5 MM	274.5 MM
G	WHEEL BASE	987.7 MM	993.7 MM	990.7 MM	992.6 MM	999.9 MM	1,008.6 MM	1,022.7 MM
H	BB CENTER TO TOPTUBE CENTER	450.8 MM	480.9 MM	501.4 MM	521.6 MM	541.4 MM	558.8 MM	571.4 MM
I	BB CENTER TO TOP OF SEATTUBE	451.8 MM	481.9 MM	502.4 MM	522.6 MM	542.4 MM	559.8 MM	572.4 MM
J	SEAT ANGLE	74.5 °	74.5 °	74.0 °	73.6 °	73.3 °	73.0 °	72.5 °
K	CHAINSTAY	412.0 MM	412.0 MM	412.0 MM	412.0 MM	412.0 MM	412.0 MM	412.0 MM
L	REACH	380.0 MM	388.0 MM	389.0 MM	389.0 MM	394.5 MM	400.0 MM	409.0 MM
M	STACK	505.0 MM	511.0 MM	527.0 MM	548.0 MM	568.0 MM	589.0 MM	606.0 MM
N	STEM LENGTH	80.0 MM	90.0 MM	100.0 MM	110.0 MM	110.0 MM	120.0 MM	120.0 MM

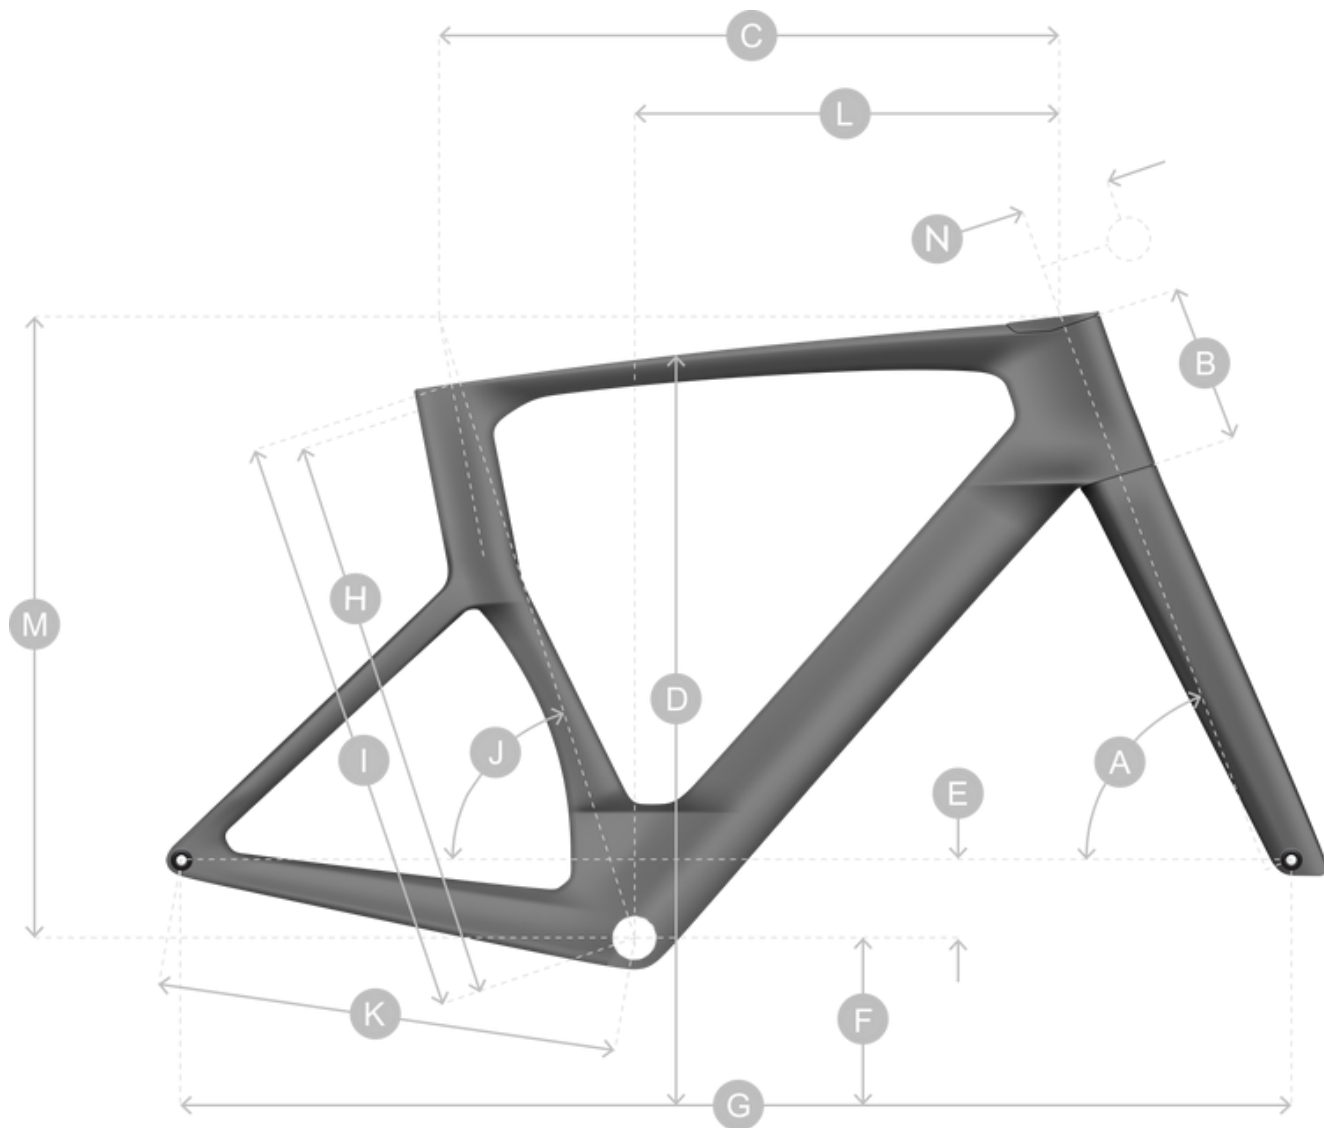